

PREVIDIA-C-REP



EN 54-2
EN 54-4
EN 54-13
EN 54-21
EN 12094-1

0051
0051-CPR-1498
0051-CPR-1499


REMOTE REPEATER PANEL

MVDH SECURITY
Peace of mind in security




PREVIDIA | COMPACT

Remote keypad with a neat, aesthetically pleasing design. It connects to a HORNET+ network (double RS485 connection) or to a LAN network, operates as a remote keypad for both Previdia Compact and Previdia Max control panels. It provides detailed information about the entire network, customizable display.

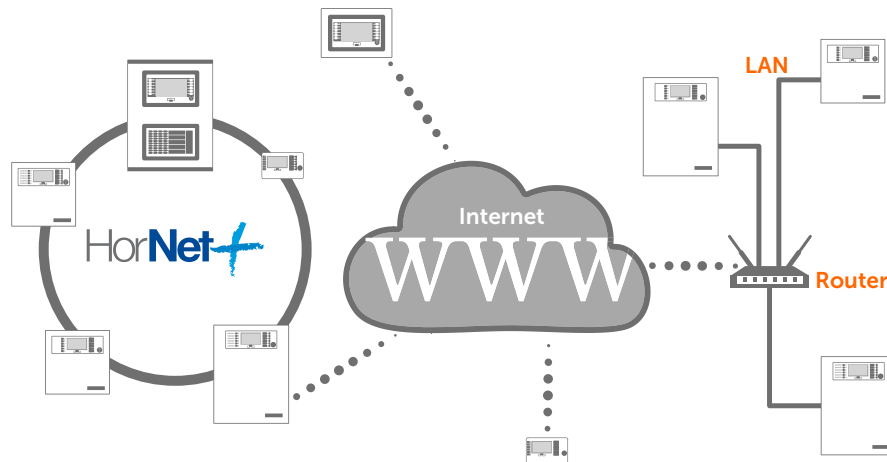


INSTALLATION

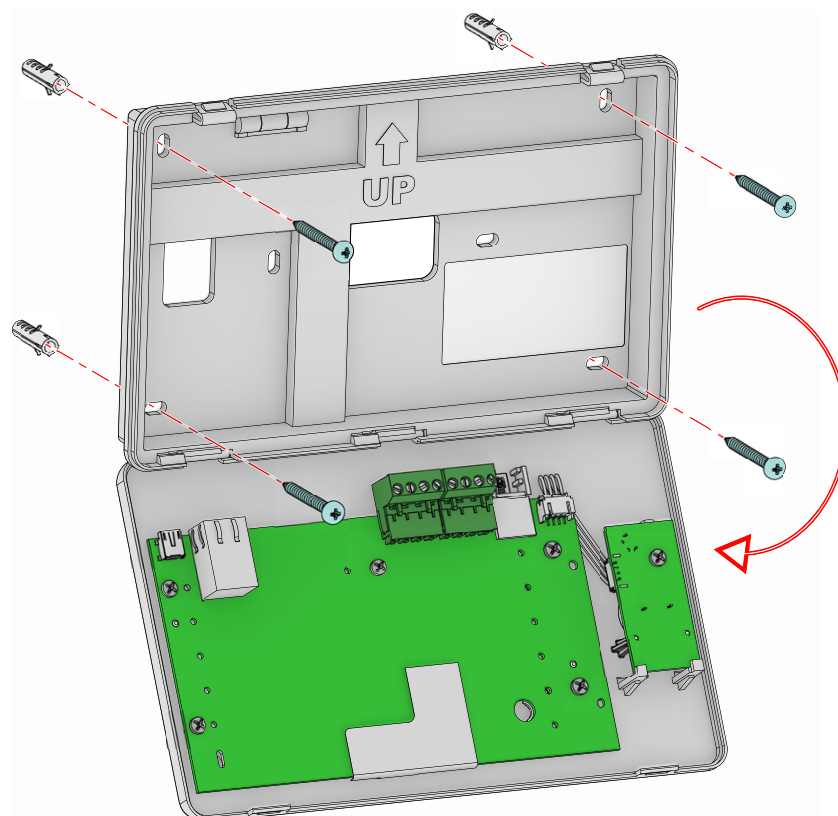

TECHNICAL SPECIFICATIONS

- Power supply voltage: 19 – 30 Vdc
- Stand-by current draw: 110mA
- Maximum current draw: 130mA
- Operating temperature: -5° .. +40° C
- Dimensions: 210 x 132 x 32mm
- Weight: 330g

CONFIGURATION DIAGRAMS

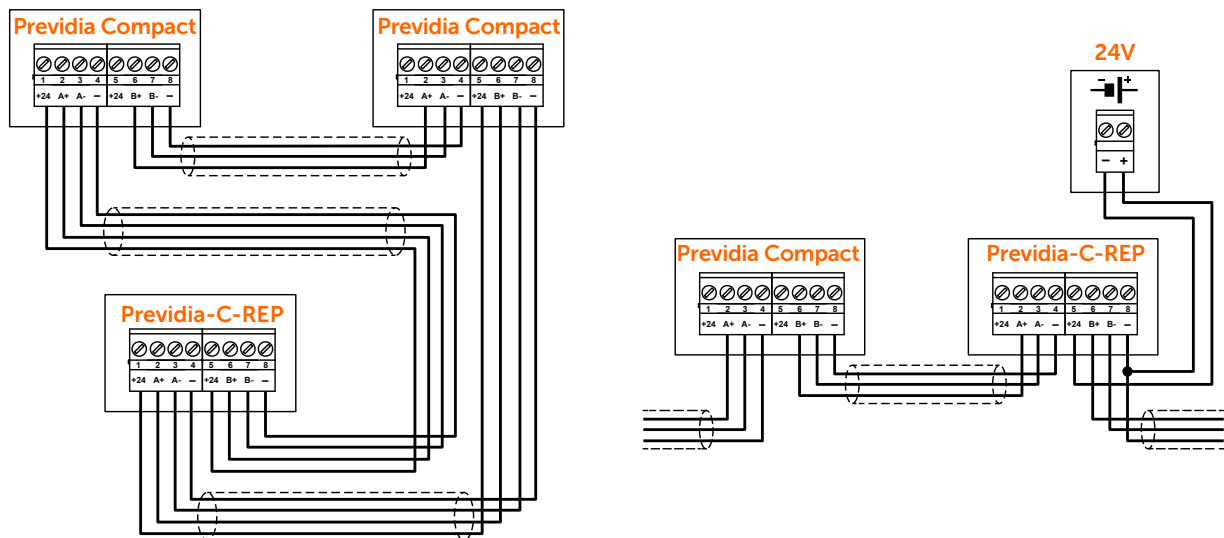

ORDER CODES

- PREVIDIA-C-REPW**
- PREVIDIA-C-REPEW**
- PREVIDIA-C-REPR**
- PREVIDIA-C-REPER**
- PREVIDIA-Cxyz**

base version. Plastic color white.
version with extinction display. Plastic color white.
base version. Plastic color red.
version with extinction display. Plastic color red.
analog addressable networkable fire detection control panel